


IRt/c'S WITHSTAND 1000G SHOCK

With simple "O-ring" mechanical supports, IRt/c's can withstand up to 1000 g shock without damage, and without shift in calibration. Such robustness makes them well suited to heavy duty applications where high levels of shock and vibration are common.

More modest forces of 10 g can be withstood on a continuous basis, but fatigue of the cable can be a problem. Mechanical support, coiling, or other appropriate cable management is recommended.

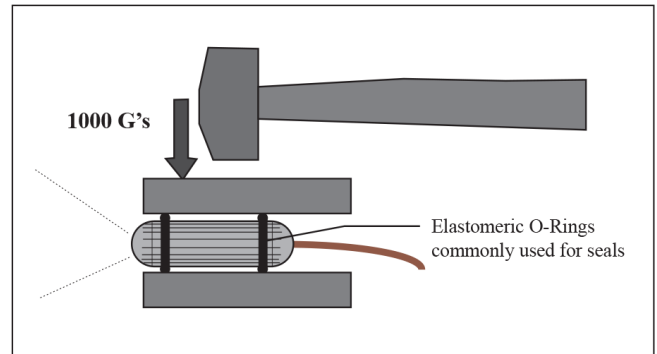

Exergen Global offices:

USA
400 Pleasant Street
Watertown, MA 02472
Tel: +1 617 923 9900 press 4 for industrial
Fax: +1 617 923 9911

The Netherlands
Pastoor Clercxstraat 26
5465 RH Veghel
Tel: +31 (0)413 376 599
Fax: +31 (0)413 379 310

industrial@exergen.com
www.exergen.com

TN-079-1-EN