


## IRt/c.5 HAS 5:1 FIELD-OF-VIEW AND BUILT-IN AIR PURGE

The IRt/c.5 model extends the range of applications for infrared thermocouple thermometry to situations where geometry requires that the sensor be mounted remotely from the target. In addition to the narrow 5:1 field of view (11° included angle), this model retains all of the ruggedness and elegant ease-of-use features of the original IRt/c models, is hermetically sealed, and is equipped standard with an internal air cool/purge system. As do all IRt/c's, this new model exceeds all applicable NEMA standards, and is intrinsically safe.

*Specifications (where different from other models):*

**Sensing Range:** -50 to 1200°F (-45 to 650°C)  
**Field of View:** 11° approx. (5:1)  
**Minimum Spot Size:** 0.8" (2 cm)  
**Output impedance:** 4 Kohms to 8 Kohms, varies by model  
**Weight:** 6.5 oz with cable (184 gm)

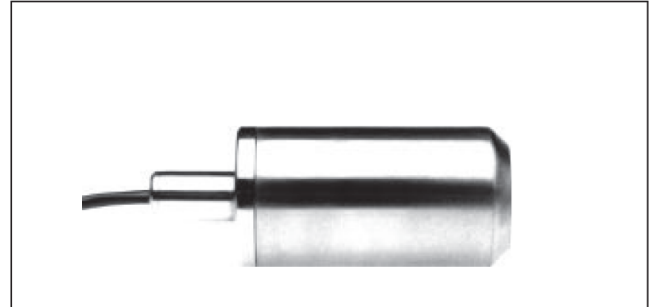

**For drawings indicating field of view, mounting, air purge path, etc., see the Catalog Section of this book.**

Exergen Corporation office:

USA  
400 Pleasant Street  
Watertown, MA 02472  
Tel: +1 617 923 9900 press 4 for industrial  
Fax: +1 617 923 9911

Exergen Industrial International/OEM Sales office:

Clever IR  
The Netherlands  
Pastoor Clercxstraat 26  
5465 RH Veghel  
Tel: +31 (0)413 376 599

industrial@exergen.com  
www.exergen.com

TN-041-1-EN